
SPECIFICATIONS


TALL CABINETS

(See "Cabinet Construction Specifications" and "Pricing Procedures" for options.) 84", 90", 93", 96" Tall are standard

Tall Cabinet Nomenclature

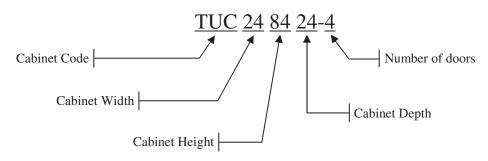

STANDARD TOE KICK HEIGHT: 4 1/2"; DEPTH: 3 1/2" STANDARD LOWER OPENING HEIGHT = 57"

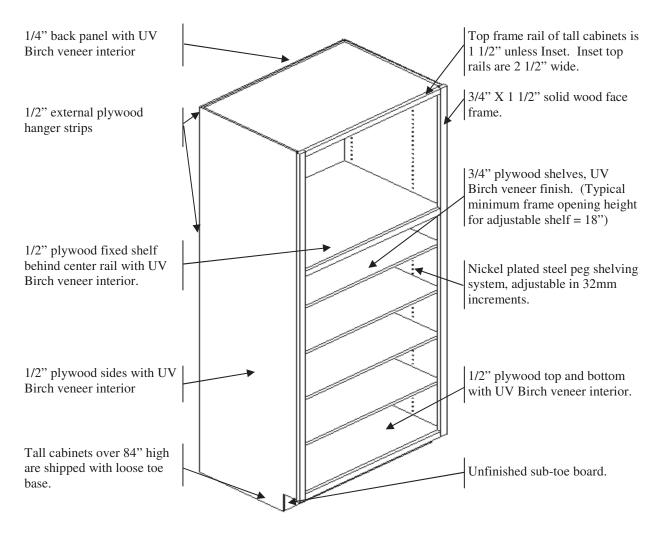



Tall Contents

CABINETS	M	ODIFICATIONS (CONTINUED)	
3 DRAWER UTILITY CABINET	13-14	ANGLED SIDE ENTRY	46
ANGLED CABINETS	17	APPLIED MOLDING CHARGE	42
CANNED GOOD STORAGE CABINET	15	BACK TOE KICK	46
MULTI-FOOD STORAGE CABINET	16	BEAD BOARD END	45
OVEN CABINET SINGLE CUTOUT		CLIPPED CORNER	47
1 DRAWER AT BOTTOM/DOORS TOP	20-21	COMBINED CABINET CHARGE	42
2 DRAWER AT BOTTOM/DOORS TOP	22-23	DOOR STAY	48
3 DRAWER AT BOTTOM/DOORS TOP	24-25	DOUBLE ENTRY	46
DOORS TOP AND BOTTOM	18-19	DRAWER HEAD UPGRADE	48
OVEN CABINET TWO CUTOUTS		DUCT CUTOUT	47
MICROWAVE/OVEN CABINET	26-27	END ENTRY	46
OVEN/WARMING DRAWER CABINET	28-29	EXTEND BOTTOM RAIL UP	41
REFRIGERATOR SURROUND CABINET	8A	EXTEND SIDE BACK	41
UTILITY CABINETS 13" DEEP	3-4	EXTEND STILE.	40-41
UTILITY VERTICAL STACK CABINETS 13"	9-10	EXTEND TOP RAIL UP OR DOWN	41
UTILITY CABINETS 24" DEEP	5-6	FALSE DOOR ON END	45
UTILITY VERTICAL STACK CABINETS 24"	11-12	FINISHED BACK	45
UTILITY CABINETS W/ ROLLOUT SHELVES.	7-8	FINISHED END.	45
WINE RACK CABINET	16	FINISHED TOP.	45
		FLUSH FINISHED END.	45
		FLUSH FINISHED TOP.	45
ACCESSORIES		FLUSH TOE KICK	46
CLOSET RODS	35	FLUTING	47
END SKIN, LOOSE	35	FRAME CHANGE	42
FLIPPER DOOR GLIDES	35	FRONT ONLY	42
REFRIGERATOR LEGS	34	FURNITURE END	44
ROLLOUT SHELVES	37	GROOVED PANEL APPLIED	45
TALL PARTITION	35	INCREASE CASE DIMENSION CHARGE	42
TALL SHELF ON DOOR	35	INTEGRATED TOE KICK	46
TOE KICK DRAWER	39	INWARD EXTENDED STILE	41
TRAY DIVIDER	35	LOOSE TOE BASE	46
FILLERS		MATCHING WOOD INTERIOR	42
OVERLAY FILLER STRIP	30	OMIT DOORS	42
TALL FILLERS	30	OMIT OPERATING DRAWER BOX	48
TALL FILLER WITH RETURN	31-32B	OMIT TOE KICK	46
TALL ANGLED FILLER WITH RETURN	33	RECESSED SIDE	41
TALL ANGLED FILLER	33	ROSETTE DESIGN	47
MODIFICATIONS		SCOOPED DRAWER SIDES	48
90 DEGREE HINGE	48	SIDE TOE KICK	
ADD CENTER RAIL	42	UNIVERSAL ACCESS TOE KICK SPACE	46
ADD CENTER STILE		U-SHAPE DRAWER BOX MODIFICATION	47
ADDITIONAL DRAWER		VALANCE BOTTOM RAIL	
ANGLED FRONT	46	VALANCE TOP RAIL	
ANGLED SIDE	1.6	WAINSCOT END DANIEL	15



TALL UTILITY CABINET, 13" DEEP



84" TALL CABINETS

- Full depth shelves.
- One adjustable shelf in upper section.
- Four adjustable shelves in lower section

90" TALL CABINETS

- Full depth shelves.
- Two adjustable shelf in upper section.
- Four adjustable shelves in lower section.
- Toe base shipped loose

93" TALL CABINETS

- Full depth shelves
- Two adjustable shelves in upper section
- Four adjustable shelves in lower section
- Toe base shipped loose

	PRODUCT CODE	LEVEL 1	LEVEL 2
84" tall	TUC128413		
	TUC158413		
	TUC188413		
	TUC218413		
	TUC248413-2		
	TUC248413-4		
	TUC278413		
	TUC308413		
	TUC338413		
	TUC368413		
00" 4-11	THG120012		
90" tall	TUC129013		
	TUC159013		
	TUC189013		
	TUC219013		
	TUC249013-2		
	TUC249013-4		
	TUC279013		
	TUC309013		
	TUC339013		
	TUC369013		
93" tall	TUC129313		
	TUC159313		
	TUC189313		
	TUC219313		
	TUC249313-2		
	TUC249313-4		
	TUC279313		
	TUC309313		
	TUC339313		
	TUC369313		



TALL UTILITY CABINET, 13" DEEP



96"	TALL	CABINETS
70		

- Full depth shelves.
- Two adjustable shelves in upper section.
- Four adjustable shelves in lower section.
- Toe base shipped loose

102" TALL CABINETS

- Full depth shelves.
- Three adjustable shelves in upper section.
- Four adjustable shelves in lower section.
- Toe base shipped loose

	PRODUCT CODE	LEVEL 1	LEVEL 2
96" tall			
90 tan	TUC129613		
	TUC159613		
	TUC189613		
	TUC219613		
	TUC249613-2		
	TUC249613-4		
	TUC279613		
	TUC309613		
	TUC339613		
	TUC369613		
102" tall	TUC1210213		
	TUC1510213		
	TUC1810213		
	TUC2110213		
	TUC2410213-2		
	TUC2410213-4		
	TUC2710213		
	TUC3010213		
	TUC3310213		
	TUC3610213		



TALL UTILITY CABINET, 24" DEEP



84" TALL CABINETS

- Full depth shelves.
- One adjustable shelf in upper section.
- Four adjustable shelves in lower section

90" TALL CABINETS

- Full depth shelves.
- Two adjustable shelf in upper section.
- Four adjustable shelves in lower section.
- Toe base shipped loose

93" TALL CABINETS

- Full depth shelves
- Two adjustable shelves in upper section
- Four adjustable shelves in lower section
- Toe base shipped loose

	PRODUCT CODE	LEVEL 1	LEVEL 2
84" tall	TUC128424		
	TUC158424		
•	TUC188424		
•	TUC218424		
•	TUC248424-2		
•	TUC248424-4		
•	TUC278424		
•	TUC308424		
•	TUC338424		
	TUC368424		
002 4 11	TI C120024		
90" tall	TUC129024		
	TUC159024		
	TUC189024		
	TUC219024		
	TUC249024-2		
	TUC249024-4		
	TUC279024		
	TUC309024		
	TUC339024		
,	TUC369024		
93" tall	TUC129324		
	TUC159324		
,	TUC189324		
•	TUC219324		
•	TUC249324-2		
•	TUC249324-4		
'	TUC279324		
·	TUC309324		
'	TUC339324		
,	TUC369324		-
,			



TALL UTILITY CABINET, 24" DEEP



96" TALL CABINETS	96"	TALL	CABINET	S
-------------------	-----	------	---------	---

- Full depth shelves.
- Two adjustable shelves in upper section.
- Four adjustable shelves in lower section.
- Toe base shipped loose

102" TALL CABINETS

- Full depth shelves.
- Three adjustable shelves in upper section.
- Four adjustable shelves in lower section.
- Toe base shipped loose

	PRODUCT	LEVEL 1	LEVEL 2
	CODE		
96" tall	TUC129624		
	TUC159624		
	TUC189624		
_	TUC219624		
_	TUC249624-2		
•	TUC249624-4		
_	TUC279624		
_	TUC309624		
•	TUC339624		
•	TUC369624		
•			
102" tall	TUC1210224		
_	TUC1510224		
	TUC1810224		
•	TUC2110224		
•	TUC2410224-2		
•	TUC2410224-4		
•	TUC2710224		
•	TUC3010224		
•	TUC3310224		
•	TUC3610224		




TALL UTILITY CABINET WITH ROLLOUT SHELVES

PRODUCT

LEVEL 1

LEVEL 2



- 24" deep standard
- Four adjustable, full width, 4" high rollouts.
- Specify left (L) or right (R) for hinge side on two door cabinets.

84" TALL CABINETS

• One full depth, adjustable shelf in upper section.

90" TALL CABINETS

- Two full depth, adjustable shelf in upper section.
- Toe base shipped loose

93" TALL CABINETS


- Two full depth, adjustable shelves in upper section.
- Toe base shipped loose

NOTE: See Rollout Shelves listed in Tall accessory section for more specific rollout details.

	CODE
84" tall	TUC128424+RO4
	TUC158424+RO4
	TUC188424+RO4
	TUC218424+RO4
	TUC248424-2+RO4
4 doors	TUC248424-4+RO4
	TUC278424+RO4
	TUC308424+RO4
	TUC338424+RO4
	TUC368424+RO4
00" 4-11	THG120024 - BO4
90" tall	TUC129024+RO4
	TUC159024+RO4
•	TUC189024+RO4
	TUC219024+RO4
	TUC249024-2+RO4
4 doors	TUC249024-4+RO4
	TUC279024+RO4
	TUC309024+RO4
	TUC339024+RO4
	TUC369024+RO4
000 - 11	TY GLOCAL DOL
93" tall	TUC129324+RO4
	TUC159324+RO4
	TUC189324+RO4
	TUC219324+RO4
	TUC249324-2+RO4
4 doors	TUC249324-4+RO4
	TUC279324+RO4
	TUC309324+RO4
•	TUC339324+RO4
•	TUC369324+RO4
•	



TALL UTILITY CABINET WITH ROLLOUT SHELVES

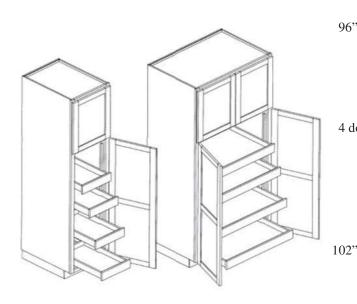

•	24"	deep	standard
---	-----	------	----------

- Four adjustable, full width, 4" high rollouts.
- Specify left (L) or right (R) for hinge side for two door cabinets.

96" TALL CABINETS

- Two full depth, adjustable shelves in upper section.
- Toe base shipped loose

102" TALL CABINETS

- Three full depth, adjustable shelves in upper section.
- Toe base shipped loose

NOTE: See Rollout Shelves listed in Tall accessory section for more specific rollout details.


	PRODUCT CODE	LEVEL 1	LEVEL 2
96" tall	TUC129624+RO4		
•	TUC159624+RO4		
•	TUC189624+RO4		
•	TUC219624+RO4		
· ·	TUC249624-2+RO4		
4 doors	TUC249624-4+RO4		
•	TUC279624+RO4		
•	TUC309624+RO4		
•	TUC339624+RO4		
•	TUC369624+RO4		
_			
102" tall	TUC1210224+RO4		
•	TUC1510224+RO4		
•	TUC1810224+RO4		
•	TUC2110224+RO4		
•	TUC2410224-2+RO4		
4 doors	TUC2410224-4+RO4		
•	TUC2710224+RO4		
•	TUC3010224+RO4		
•	TUC3310224+RO4		
•	TUC3610224+RO4		
•			




TALL REFRIGERATOR SURROUND CABINET



	PRODUCT CODE	LEVEL 1	LEVEL 2
24" deep	TRS408424		
•	TRS409024		
•	TRS409324		
•	TRS409624		
•	TRS4010224		
_	TRS4010824		
•			
30" deep	TRS408430		
•	TRS409030		
	TRS409330		
•	TRS409630		
•	TRS4010230		
•	TRS4010830		






Note: When beaded Inset—Both leg version will be beaded around the lower appliance opening. Single Leg version will not have a bead around the lower opening unless specifically requested on the order by the designer.

TRS409624R (Right Leg)

- 40" wide, standard
- Available at 24" and 30" deep.
- Lower opening is 37" wide, sized for 36" wide refrigerator unit.
- Standard with Furniture Flush Ends, Matching Wood Interior and Finished Wall Bottom.
- Lower opening is 73" high. Add MFC (frame change) with a note on the order for a taller lower opening.
- 1 1/2" full length framing on face of return.
- Specify B (both legs), L (left leg) or R (right leg).
- One 3/4" adjustable shelf in upper of 96" H cabinet.
- Two 3/4" adjustable shelves in upper of 102" H and 108" H cabinet.
- L and R versions shipped with bracing that must be removed before installation.
- Verify ceiling height clearances for installation.
- Products over 96" tall may require a splice due to material limitations.



VERTICAL STACK CABINET SPECIFICATIONS

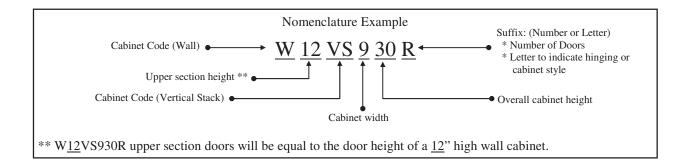

- Cabinets that have the look of two cabinets that have been stacked one on top of the other.
- Wall cabinets have two frame openings, one top and one bottom, with a center frame rail and fixed center floor dividing the two sections.
- Tall cabinets have three frame openings, one top, one middle, and one bottom, with a center frame rail and fixed center floor dividing each section.
- Offered standard with top doors equal to 12", 15", 18" or 21" high cabinets. Upper door heights will align with cabinet height equal to first set of numbers listed in the nomenclature. See example above.
- "Single door" indicates one door across width for each opening. "Two doors" indicates 2 butt-doors for each opening.
- Specify L or R for hinge side when applicable.
- Shelf quantities are dependent on the specific opening height of each section. A minimum of 18" frame height opening is required for an adjustable shelf.
- Matching wood interior modification (MMWI) will change the entire cabinet interior to have a finished interior.
- For vertical stacked wall cabinets: Any height change will modify the cabinet in the <u>lower section</u>. The <u>upper frame opening height</u> will not change unless specified on the order and will require a frame change charge (MFC).
- For vertical stacked tall cabinets: Any height change will modify the cabinet in the <u>middle section</u>. The <u>top and bottom frame opening heights</u> will not change unless specified on the order and will require a frame change charge (MFC).
- FOL-C overlay cabinet has a 3" face frame mid-rail below the top section. All other overlays have a 1 1/2" face frame mid-rail.
- Cabinets 39" wide or greater will have a fixed center stile in each section as standard.



TALL UTILITY, VERTICAL STACK CABINET, 13" DEEP




- See Vertical Stack Cabinet Specifications on page W12 for more information.
- Toe base shipped loose
- Full depth shelves
- Four adjustable shelves in lower section.
- T21VS cabinets have one adjustable shelf in the top section.
- Shelf quantity in the center section can vary depending on overall cabinet height and height of top section.
- Minimum frame opening must be 18" high for adjustable shelf.

	PRODUCT CODE	LEVEL 1	LEVEL 2
102" tall	T_VS1210213		
	T_VS1510213		
	T_VS1810213		
	T_VS2110213		
	T_VS2410213-2		
	T_VS2410213-4		
	T_VS2710213		
	T_VS3010213		
	T_VS3310213		
	T_VS3610213		
105" tall	T_VS1210513		
	T_VS1510513		
	T_VS1810513		
	T_VS2110513		
	T_VS2410513-2		
	T_VS2410513-4		
	T_VS2710513		
	T_VS3010513		
	T_VS3310513		
	T_VS3610513		
100" toll	T VC1210012		
108 tan	T_VS1210813		
	T_VS1510813		
	T_VS1810813		
	T_VS2110813		
	T_VS2410813-2		
	T_VS2410813-4		
	T_VS2710813		
	T_VS3010813		
	T_VS3310813		
	T_VS3610813		



TALL UTILITY CABINET, VERTICAL STACK 13" DEEP







- See Vertical Stack Cabinet Specifications on page W12 for more information.
- Toe base shipped loose
- Full depth shelves
- Four adjustable shelves in lower section.
- T21VS cabinets have one adjustable shelf in the top section.
- Shelf quantity in the center section can vary depending on overall cabinet height and height of top section.
- Minimum frame opening must be 18" high for adjustable shelf.

CODE	
111" tall T_VS1211113	
T_VS1511113	
T_VS1811113	
T_VS2111113	
T_VS2411113-2	
T_VS2411113-4	
T_VS2711113	
T_VS3011113	
T_VS3311113	
T_VS3611113	
114" tall T VS1211413	
T_VS1511413	
T_VS1811413	
T_VS2111413	
T_VS2411413-2	
T_VS2411413-4	
T_VS2711413	
T_VS3011413	
T_VS3311413	
T_VS3611413	
1177 11 T VG1011710	
117" tall T_VS1211713	
T_VS1511713	
T_VS1811713	
T_VS2111713	
T_VS2411713-2 T_VS2411713-4	
T VS2711713	
T VS3011713	
T_VS3311713	
T_VS3611713	



TALL UTILITY CABINET, VERTICAL STACK 24" DEEP







- See Vertical Stack Cabinet Specifications on page W12 for more information.
- Toe base shipped loose
- Full depth shelves
- Four adjustable shelves in lower section.
- T21VS cabinets have one adjustable shelf in the top section.
- Shelf quantity in the center section can vary depending on overall cabinet height and height of top section.
- Minimum frame opening must be 18" high for adjustable shelf.

	PRODUCT CODE	LEVEL 1	LEVEL 2
102" tall	T_VS1210224		
	T_VS1510224		
	T_VS1810224		
	T_VS2110224		
	T_VS2410224-2		
	T_VS2410224-4		
	T_VS2710224		
	T_VS3010224		
	T_VS3310224		
	T_VS3610224		
105" tall	T_VS1210524		
	T_VS1510524		
	T_VS1810524		
	T_VS2110524		
	T_VS2410524-2		
	T_VS2410524-4		
	T_VS2710524		
	T_VS3010524		
	T_VS3310524		
	T_VS3610524		
108" tall	T_VS1210824		
	T_VS1510824		
	T_VS1810824		
	T_VS2110824		
	T_VS2410824-2		
	T_VS2410824-4		
	T_VS2710824		
	T_VS3010824		
	T_VS3310824		
	T_VS3610824		



TALL UTILITY CABINET, VERTICAL STACK 24" DEEP






- See Vertical Stack Cabinet Specifications on page W12 for more information.
- Toe base shipped loose
- Full depth shelves
- Four adjustable shelves in lower section.
- T21VS cabinets have one adjustable shelf in the top section.
- Shelf quantity in the center section can vary depending on overall cabinet height and height of top section.
- Minimum frame opening must be 18" high for adjustable shelf.

	PRODUCT CODE	LEVEL 1	LEVEL 2
111" tall	T_VS1211124		
	T_VS1511124		
	T_VS1811124		
	T_VS2111124		
	T_VS2411124-2		
	T_VS2411124-4		
	T_VS2711124		
	T_VS3011124		
	T_VS3311124		
	T_VS3611124		
114" tall	T_VS1211424		
	T_VS1511424		
	T_VS1811424		
	T_VS2111424		
	T_VS2411424-2		
	T_VS2411424-4		
	T_VS2711424		
	T_VS3011424		
	T_VS3311424		
	T_VS3611424		
1 1 722 4-11	T VC1211724		
11/" tall	T_VS1211724		
	T_VS1511724		
	T_VS1811724		
	T_VS2111724		
	T_VS2411724-2		
	T_VS2411724-4		
	T_VS2711724 T_VS3011724		
	T_VS3011724 T_VS3311724		
	T_VS3611724		
	1_ 1 3 3 0 1 1 / 24		



TALL 3 DRAWER UTILITY CABINET

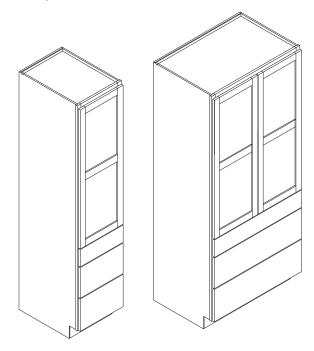

- 24" deep standard
- One fixed shelf and center rail between lower drawers and upper door(s).
- Drawers align with standard 34 1/2" high base configuration.
- 4" high standard top drawer box, two 8" high lower drawer boxes
- Specify left (L) or right (R) for hinge side for single door cabinets.

84" TALL CABINETS

• Three full depth, adjustable shelves in upper section.

90" TALL CABINETS

- Four full depth, adjustable shelves in upper section.
- Toe base shipped loose


93" TALL CABINETS

- Four full depth, adjustable shelves in upper section.
- Toe base shipped loose

	PRODUCT CODE	LEVEL 1	LEVEL 2
84" tall	T3DUC128424		
•	T3DUC158424		
•	T3DUC188424		
· ·	T3DUC218424		
_	T3DUC248424		
2 doors	T3DUC248424-2		
_	T3DUC278424		
_	T3DUC308424		
•	T3DUC338424		
_	T3DUC368424		
00" toll	T2DIJC120024		
90" tall	T3DUC129024		
	T3DUC159024		
	T3DUC189024		
	T3DUC219024		
2.1	T3DUC249024		
2 doors	T3DUC249024-2		
	T3DUC279024		
	T3DUC309024		
-	T3DUC339024		
-	T3DUC369024		
93" tall	T3DUC129324		
•	T3DUC159324		
•	T3DUC189324		
•	T3DUC219324		
•	T3DUC249324		
2 doors	T3DUC249324-2		
•	T3DUC279324		
•	T3DUC309324		
•	T3DUC339324		
•	T3DUC369324		
•			



TALL 3 DRAWER UTILITY CABINET

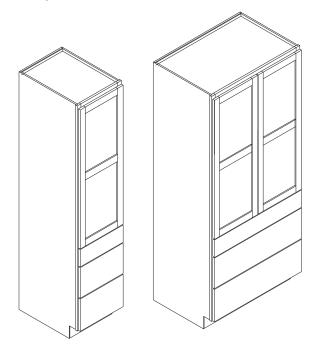

- 24" deep standard
- One fixed shelf and center rail between lower drawers and upper door(s).
- Drawers align with standard 34 1/2" high base configuration.
- 4" high standard top drawer box, two 8" high lower drawer boxes
- Specify left (L) or right (R) for hinge side for single door cabinets.

96" TALL CABINETS

- Five full depth, adjustable shelves in upper section.
- Toe base shipped loose


102" TALL CABINETS

- Five full depth, adjustable shelves in upper section.
- Toe base shipped loose

	PRODUCT CODE	LEVEL 1	LEVEL 2
96" tall	T3DUC129624		
	T3DUC159624		
	T3DUC189624		
	T3DUC219624		
	T3DUC249624		
2 doors	T3DUC249624-2		
	T3DUC279624		
	T3DUC309624		
	T3DUC339624		
	T3DUC369624		
102" tall	T3DUC1210224		
	T3DUC1510224		
	T3DUC1810224		
	T3DUC2110224		
	T3DUC2410224		
2 doors	T3DUC2410224-2		
·	T3DUC2710224		
·	T3DUC3010224		
•	T3DUC3310224		
•	T3DUC3610224		
•			



TALL CANNED GOOD STORAGE

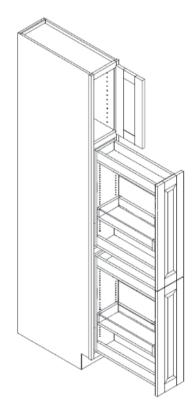


- 24" deep standard
- Two separate pullout canned good storage racks
- One adjustable canned good shelf per pullout
- Top opening does not have pullout but instead will have full depth adjustable shelves based on overall cabinet height.
- 90", 93", 96" and 102" tall cabinets will ship with loose toe base.
- Specify hinge side for top door.

	PRODUCT CODE	LEVEL 1	LEVEL 2
One adjustable shelf	TCGS98424		
in upper section	TCGS128424		
	TCGS158424		
	TCGS188424		
	TCGS218424		
Two adjustable shelves	TCGS99024		
in upper section	TCGS129024		
	TCGS159024		
	TCGS189024		
	TCGS219024		
5	TCGS99324		
in upper section	TCGS129324		
	TCGS159324		
	TCGS189324		
	TCGS219324		
Two adjustable shelves in upper section	TCGS99624		
in upper section	TCGS129624		
	TCGS159624		
	TCGS189624		
	TCGS219624		
There adjusts his shalves	TCCC010224		
Three adjustable shelves in upper section	TCGS910224		
in apper section	10031210224		
	TCGS1510224		
	TCGS1810224		
	TCGS2110224		

NOTE: Tall Canned Good Storage Units under 8" wide are not recommended to store cans. The shelf would only be wide enough for spices or other smaller items.




TALL CABINETS



TALL MULTI-FOOD STORAGE

- 24" deep standard
- Wood shelf units
- Lower section has four adjustable shelves on each swing out and door mounted storage rack. Four shallow adjustable shelves at back.
- 36" wide cabinet has center partition in lower section.
- 84" tall cabinet: one shelf in upper section.
- 90", 93", & 96" tall cabinet: two shelves in upper section.
- 102" tall cabinet: three shelves in upper section.
- Toe base shipped loose for cabinets over 84" tall.
- Door(s) must be able to open a minimum of 105° to allow access to the storage space in the rear.

	PRODUCT CODE	LEVEL 1	LEVEL 2
Two door	TMFS188424		
	TMFS189024		
	TMFS189324		
	TMFS189624		
	TMFS1810224		
Four door	TMFS368424		
	TMFS369024		
	TMFS369324		
	TMFS369624		
	TMFS3610224		



TWCV684	n/a
TWCV690	n/a
TWCV693	n/a
TWCV696	n/a
TWCV6102	n/a

TALL WINE CUBBY VERTICAL

- 13" deep standard
- 1/2" plywood, framed construction
- Floors scooped so bottles do not roll
- Interior finished in matching job specie /stain.
- Toe base shipped loose for cabinets over 84" tall.




TALL ANGLED CABINETS











PRODUCT CODE	LEVEL 1	LEVEL 2
TAC-1 248424		
TAC-1 249024		
TAC-1 249324		
TAC-1 249624		
TAC-1 2410224		
TAC-2 248424		
TAC-2 249024		
TAC-2 249324		_
TAC-2 249624		
TAC-2 2410224		

1 FRONT AND 2 FRONT ANGLED CABINETS

- 24" wide and 24" deep standard
- Four adjustable shelves in lower section.
- 84" tall cabinets: one shelf in upper section
- 90", 93", & 96" tall cabinets: two shelves in upper section
- 102" tall cabinets: three shelves in upper section.
- Toe base shipped loose for cabinets over 84" tall.





TAFC1384	
TAFC1390	
TAFC1393	
TAFC1396	
TAFC13102	

TALL ANGLED FRONT CABINET

- 13" wide with 40 degree angled front frame
- Short side = 13" deep, long side = 24" deep
- Specify left (L) or right (R) to indicate end of cabinet run for deeper cabinet side.
- Hinging will be to the shallower side (left (L) illustrated). If opposite hinging is required please specify on order.
- Four adjustable shelves in lower section.
- 84" tall cabinets: one shelf in upper section
- 90", 93", & 96" tall cabinets: two shelves in upper section
- 102" tall cabinets: three shelves in upper section.
- Toe base shipped loose for cabinets over 84" tall.
- For a 45 degree angle on the front, the width of the cabinet will need to be 11" wide with 13" depth for the shallow side. Or, the depth of the shallow side will need to be 11" keeping the width at 13".



TOC

Tall Oven Cabinet

**Standard 3" wide rails above and below cutout, specify if another dimension is required

<u>NOTE</u>: Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry. Designer must specify in writing if the appliance opening is to have a bead.


**For figuring reveals for install kits, drawer fronts overlay the oven rail by the following standard amounts:

Hinge	Overlay	
FOL-C	1 1/4"	
SOL-C/SOL-K	1/2"	
SOL-K LIPPED 5/16" ***		
Specify if another dimension is desired ***		

^{***}SOL-K Lipped overlays cannot be modified


Provide the following dimensions:		
A=	Overall cabinet width	
B=	Overall cabinet height	
C=Ht. cutout to start from floor (recommended ht. of 36" to align with std. base height cabinets)		
D*=	Oven cutout width	
E=	Oven cutout height	
*Cutout may be no wider than 1 1/2" less the overall cabinet width, see chart		

Cabinet width	Max cutout width*
24"	22 1/2"
27"	25 1/2"
30"	28 1/2"
33"	31 1/2"
36"	34 1/2"

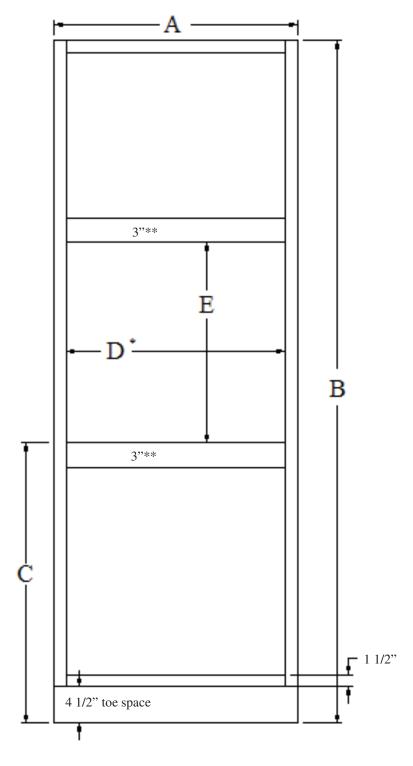



TALL OVEN CABINET, 4 DOORS

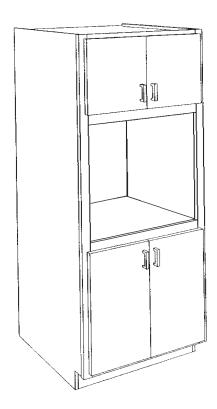

- 24" deep standard
- Specify the cutout size (width X height) and distance from floor to bottom of cutout. Use of template page for TOC is recommended.
- To allow for doors equal to standard base height, cutout must start at 36" off floor.
- The cutout width can be no more than 1 1/2" less than the overall cabinet width, this leaves a minimum of 3/4" for
 - each frame stile (left and right). Example: 30" wide cabinets, the largest cutout width allowable is 28 1/2".
- 3" rail above and below cutout standard.
- Number of shelves in the upper section of Tall Oven Cabinets will vary according to the opening size.
 This
 - opening is determined by the oven cutout and height off
 - the floor specifications.
- Cutout back at oven opening.
- Toe base shipped loose for cabinets over 84" tall.
- See template page for more details.
- Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry.
 Designer must specify in writing if the appliance opening is to have a bead.

	PRODUCT CODE	LEVEL 1	LEVEL 2
84" tall	TOC248424		
•	TOC278424		
·	TOC308424		
·	TOC338424		
	TOC368424		
90" tall	TOC249024		
·	TOC279024		
•	TOC309024		
•	TOC339024		
•	TOC369024		
93" tall	TOC249324		
	TOC279324		
	TOC309324		
	TOC339324		
	TOC369324		
0.67 - 11	TO CO 10 (0.1		
96" tall	TOC249624		
	TOC279624		
	TOC309624		
	TOC339624		
	TOC369624		
102" tall	TOC2410224		
	TOC2710224		
	TOC3010224		
	TOC3310224		
	TOC3610224		

NOTE: TOC cabinet cannot have decorative ends except for a standard finish end or standard flush finish when using maximum width cutout for the specific cabinet's overall width.



T1DOC

Tall One Drawer Oven Cabinet

**Standard 3" wide rails above and below cutout, specify if another dimension is required

<u>NOTE</u>: Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry. Designer must specify in writing if the appliance opening is to have a bead.


**For figuring reveals for install kits, drawer fronts overlay the oven rail by the following standard amounts:

Hinge	Overlay	
FOL-C	1 1/4"	
SOL-C/SOL-K	1/2"	
SOL-K LIPPED 5/16" ***		
Specify if another dimension is desired ***		

^{***}SOL-K Lipped overlays cannot be modified


Provide the following dimensions:	
A=	Overall cabinet width
B=	Overall cabinet height
C=from floor (recomme	_Ht. cutout to start ended min. height = 14")
D*=	Oven cutout width
E=	Oven cutout height
*Cutout may be no wider than 1 1/2" less the overall cabinet width, see chart	

Max cutout width*
22 1/2"
25 1/2"
28 1/2"
31 1/2"
34 1/2"

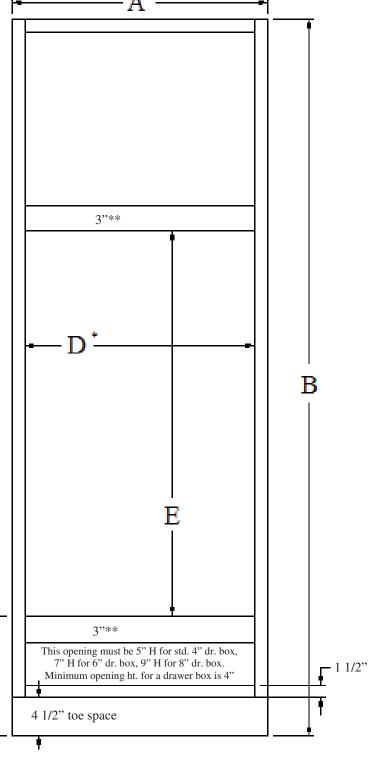



TALL OVEN CABINET 1 DRAWER, 2 DOORS

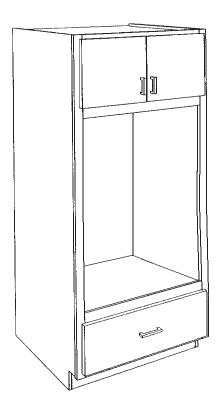

- 24" deep standard
- Specify the cutout size (width X height) and distance from floor to bottom of cutout. Use of template page for T1DOC is recommended.
- To allow for a standard size drawer box at the bottom, the cutout must start at least 14" off of floor.
- The cutout width can be no more than 1 1/2" less than the overall cabinet width, this leaves a minimum of 3/4" for each frame stile (left and right). Example: 30" wide cabinets, the largest cutout width allowable is 28 1/2".
- 3" rail above and below cutout.
- Number of shelves in the upper section of Tall Oven Cabinets will vary according to the opening size. This opening is determined by the oven cutout and height off the floor specifications.
- Cutout back at oven opening.
- Toe base shipped loose for cabinets over 84" tall.
- See template page for more details.
- Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry. Designer must specify in writing if the appliance opening is to have a bead.

	PRODUCT CODE	LEVEL 1	LEVEL 2
84" tall	T1DOC248424		
	T1DOC278424		
	T1DOC308424		
	T1DOC338424		
	T1DOC368424		
90" tall	T1DOC249024		
	T1DOC279024		
	T1DOC309024		
	T1DOC339024		
	T1DOC369024		
93" tall	T1DOC249324		
	T1DOC279324		
	T1DOC309324		
	T1DOC339324		
	T1DOC369324		
96" tall	T1DOC249624		
	T1DOC279624		
	T1DOC309624		
	T1DOC339624		
	T1DOC369624		
102" tall	T1DOC2410224		
	T1DOC2710224		
	T1DOC3010224		
	T1DOC3310224		
	T1DOC3610224		

NOTE: T1DOC cabinet cannot have decorative ends except for a standard finish end or standard flush finish when using maximum width cutout for the specific cabinet's overall width.



T2DOC

Tall Two Drawer Oven Cabinet

**Standard 3" wide rails above and below cutout, specify if another dimension is required

<u>NOTE</u>: Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry. Designer must specify in writing if the appliance opening is to have a bead.

**For figuring reveals for install kits, drawer fronts overlay the oven rail by the following standard amounts:


Hinge	Overlay	
FOL-C	1 1/4"	
SOL-C/SOL-K	1/2"	
SOL-K LIPPED	5/16" ***	
Specify if another dimension is desired ***		

^{***}SOL-K Lipped overlays cannot be modified

SOL-IX	Lipped	Overrays	Camilot	UC	mounic


Provide the following dimensions:	
A=	Overall cabinet width
B=	Overall cabinet height
C=Ht. cutout to start from floor (recommended ht. of 20 1/2" to allow for two std. 4" drawer boxes)	
D*=	Oven cutout width
E=	Oven cutout height
*Cutout may be no wider than 1 1/2" less the overall cabinet width, see chart	

Cabinet width	Max cutout width*
24"	22 1/2"
27"	25 1/2"
30"	28 1/2"
33"	31 1/2"
36"	34 1/2"

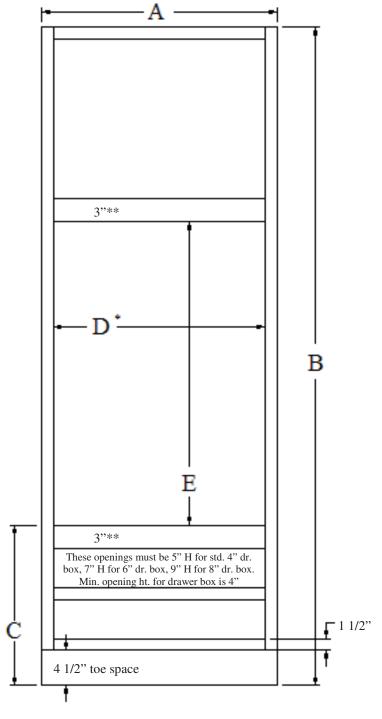



TALL OVEN CABINET 2 DRAWERS, 2 DOORS

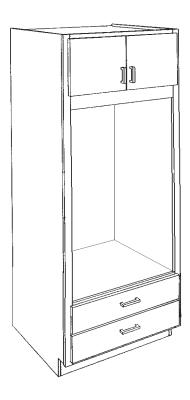

- 24" deep standard
- Specify the cutout size (width X height) and distance from floor to bottom of cutout. Use of template page for T2DOC is recommended.
- To allow for two standard size drawer boxes, the cutout must start at least 20 1/2" off of floor.
- The cutout width can be no more than 1 1/2" less than the overall cabinet width, this leaves a minimum of 3/4" for each frame stile (left and right). Example: 30" wide

cabinets, the largest cutout width allowable is 28 1/2".

- 3" rail above and below cutout.
- Number of shelves in the upper section of Tall Oven Cabinets will vary according to the opening size.
 This opening is determined by the oven cutout and height off the floor specifications.
- Drawers will be equal height unless otherwise specified.
- Cutout back at oven opening.
- Toe base shipped loose for cabinets over 84" tall.
- See template page for more details.
- Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry.
 Designer must specify in writing if the appliance opening is to have a bead.

	PRODUCT CODE	LEVEL 1	LEVEL 2
84" tall	T2DOC248424		
	T2DOC278424		
	T2DOC308424		
	T2DOC338424		
	T2DOC368424		
90" tall	T2DOC249024		
	T2DOC279024		_
	T2DOC309024		
	T2DOC339024		_
	T2DOC369024		
93" tall	T2DOC249324		
	T2DOC279324		
	T2DOC309324		
	T2DOC339324		
	T2DOC369324		
96" tall	T2DOC249624		
	T2DOC279624		
	T2DOC309624		_
	T2DOC339624		_
	T2DOC369624		
102" tall	T2DOC2410224		
	T2DOC2710224		
	T2DOC3010224		
	T2DOC3310224		
	T2DOC3610224		

NOTE: T2DOC cabinet cannot have decorative ends except for a standard finish end or standard flush finish when using maximum width cutout for the specific cabinet's overall width.



T3DOC

Tall Three Drawer Oven Cabinet

**Standard 3" wide rails above and below cutout, specify if another dimension is required

<u>NOTE</u>: Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry. Designer must specify in writing if the appliance opening is to have a bead.


**For figuring reveals for install kits, drawer fronts overlay the oven rail by the following standard amounts:

Hinge	Overlay		
FOL-C	1 1/4"		
SOL-C/SOL-K	1/2"		
SOL-K LIPPED	OL-K LIPPED 5/16" ***		
Specify if another dimension is desired ***			

^{***}SOL-K Lipped overlays cannot be modified

Provide the following dimensions:		
A=	Overall cabinet width	
B=	Overall cabinet height	
`	Ht. cutout to start recommended ht. of 36" to std. base height cabinets)	
D*=	Oven cutout width	
E=	Oven cutout height	
	be no wider than 1 1/2" less ll cabinet width, see chart	

Cabinet width	Max cutout width*
24"	22 1/2"
27"	25 1/2"
30"	28 1/2"
33"	31 1/2"
36"	34 1/2"

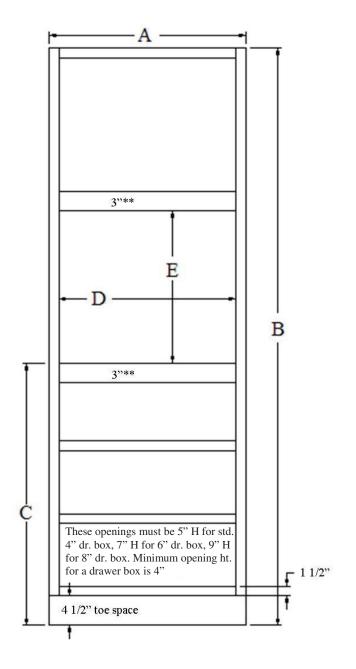



TALL OVEN CABINET 3 DRAWERS, 2 DOORS



- 24" deep standard
- Specify the cutout size (width X height) and distance from floor to bottom of cutout. Use of template page for T3DOC is recommended.
- To allow for drawers equal to standard height three drawer base, the cutout must start at 36" off of floor.
- The cutout width can be no more than 1 1/2" less than the overall cabinet width, this leaves a minimum of 3/4" for each frame stile (left and right). Example: 30" wide cabinets, the largest cutout width allowable is 28 1/2".
- 3" rail above and below cutout.
- Number of shelves in the upper section of Tall Oven Cabinets will vary according to the opening size.
 This
 - opening is determined by the oven cutout and height off
 - the floor specifications.
- Drawers will be equal height unless otherwise specified.
- Cutout back at oven opening.
- Toe base shipped loose for cabinets over 84" tall.
- See template page for more details.
- Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry.
 Designer must specify in writing if the appliance opening is to have a bead.

PRODUCT CODE	LEVEL 1	LEVEL 2
T3DOC248424		
T3DOC278424		
T3DOC308424		
T3DOC338424		
T3DOC368424		
T3DOC249024		
T3DOC279024		
T3DOC309024		
T3DOC339024		
T3DOC369024		
T3DOC249324		
T3DOC279324		
T3DOC309324		
T3DOC339324		
T3DOC369324		
T2DOC240624		
T3DOC369624		
T2D 0 C2 41 0 22 4		
T3DOC3010224		
T3DOC3310224		
T3DOC3610224		
	T3DOC249024 T3DOC309024 T3DOC309024 T3DOC369024 T3DOC369024 T3DOC379024 T3DOC379024 T3DOC379024 T3DOC369024 T3DOC379324 T3DOC379624 T3DOC379624 T3DOC379624 T3DOC379624 T3DOC379624 T3DOC379624	T3DOC248424 T3DOC308424 T3DOC338424 T3DOC338424 T3DOC368424 T3DOC249024 T3DOC309024 T3DOC339024 T3DOC369024 T3DOC279324 T3DOC309324 T3DOC339324 T3DOC369324 T3DOC369324 T3DOC369624 T3DOC339624 T3DOC369624 T3DOC369624 T3DOC369624 T3DOC369624 T3DOC369624 T3DOC369624 T3DOC369624 T3DOC369624 T3DOC369624

NOTE: T3DOC cabinet cannot have decorative ends except for a standard finish end or standard flush finish when using maximum width cutout for the specific cabinet's overall width.



TMOC

Tall Microwave Oven Cabinet

**Standard 3" wide rails above and below cutout, specify if another dimension is required

<u>NOTE</u>: Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry. Designer must specify in writing if the appliance opening is to have a bead.


**For figuring reveals for install kits, drawer fronts overlay the oven rail by the following standard amounts:

Hinge	Overlay	
FOL-C	1 1/4"	
SOL-C/SOL-K	1/2"	
SOL-K LIPPED 5/16" ***		
Specify if another dimension is desired ***		

^{***}SOL-K Lipped overlays cannot be modified


ı		
Provide the following dimensions:		
A=	Overall cabinet width	
B=	Overall cabinet height	
	Ht. cutout to start commended min. height = 14")	
D*=	Oven cutout width	
E=	Oven cutout height	
F*=	Microwave cutout width	
G=	Microwave cutout height	
	be no wider than 1 1/2" less Il cabinet width, see chart	

Cabinet width	Max cutout width*
24"	22 1/2"
27"	25 1/2"
30"	28 1/2"
33"	31 1/2"
36"	34 1/2"

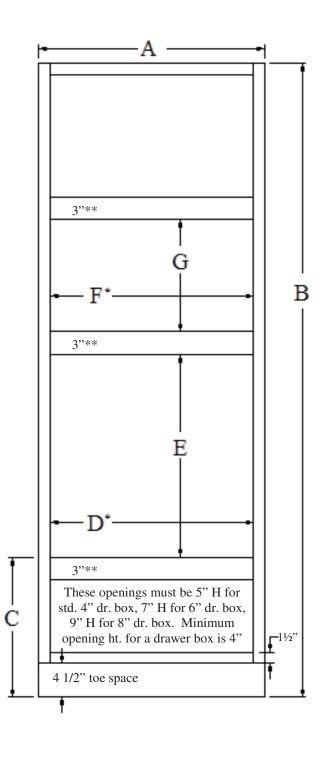



TALL MICROWAVE OVEN CABINET 1 DRAWER, 2 DOORS

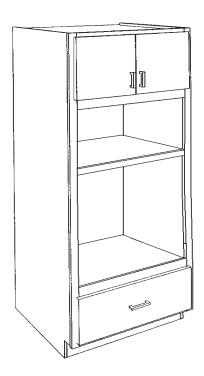

- 24" deep standard
- Two appliance cutouts
- Specify both cutout sizes (width X height) and distance from floor to bottom of lower cutout. Use of template page for TMOC is recommended.
- To allow for a standard size drawer box at the bottom, the cutout must start at least 14" off of floor. A 3" rail will separate the cutouts unless otherwise specified.
- The cutout width can be no more than 1 1/2" less than the overall cabinet width, this leaves a minimum of 3/4" for each frame stile (left and right). Example: 30" wide cabinets, the largest cutout width allowable is 28 1/2".
- 3" rail above and below cutout.
- Number of shelves in the upper section of Tall Oven Cabinets will vary according to the opening size. This opening is determined by the oven cutout and height off the floor specifications.
- Drawers will be equal height unless otherwise specified.
- Cutout back at oven opening only.
- Toe base shipped loose for cabinets over 84" tall.
- See template page for more details.
- Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry. Designer must specify in writing if the appliance opening is to have a bead.

	PRODUCT CODE	LEVEL 1	LEVEL 2
84" tall	TMOC248424		
•	TMOC278424		
•	TMOC308424		
•	TMOC338424		
	TMOC368424		
90" tall	TMOC249024		
-	TMOC279024		
	TMOC309024		
_	TMOC339024		
	TMOC369024		
93" tall	TMOC249324		
•	TMOC279324		
•	TMOC309324		
•	TMOC339324		
	TMOC369324		
96" tall	TMOC249624		
-	TMOC279624		
-	TMOC309624		
•	TMOC339624		
•	TMOC369624		
102" tall	TMOC2410224		
	TMOC2710224		
•	TMOC3010224		
•	TMOC3310224		
	TMOC3610224		

NOTE: TMOC cabinet cannot have decorative ends except for a standard finish end or standard flush finish when using maximum width cutout for the specific cabinet's overall width.



TWDOC

Tall Warming Drawer Oven Cabinet

**Standard 3" wide rails above and below cutout, specify if another dimension is required

<u>NOTE</u>: Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry. Designer must specify in writing if the appliance opening is to have a bead.

**For figuring reveals for install kits, drawer fronts overlay the oven rail by the following standard amounts:


Hinge	Overlay	
FOL-C	1 1/4"	
SOL-C/SOL-K	1/2"	
SOL-K LIPPED 5/16" ***		
Specify if another dimension is desired ***		

^{***}SOL-K Lipped overlays cannot be modified

Provide the following dimensions:			
A=	Overall cabinet width		
B=	Overall cabinet height		
C=from floor	Height oven cutout to start (see below for calculation of 'C')		
D*=	Oven cutout width		
E=	Oven cutout height		
F*=	Warming drawer cutout width		
G=	Warming drawer cutout height		
*Cutou	it may be no wider than 1 1/2" less		

Cabinet width	Max cutout width*
24"	22 1/2"
27"	25 1/2"
30"	28 1/2"
33"	31 1/2"
36"	34 1/2"


the overall cabinet width, see chart

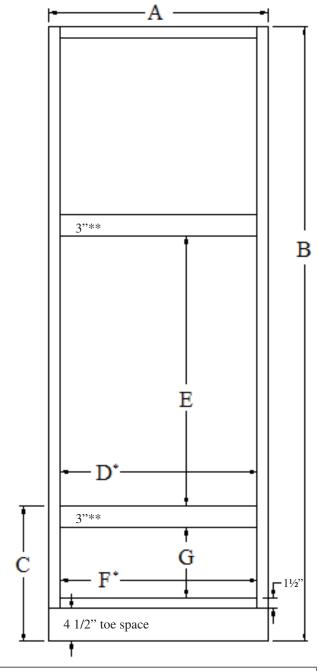

To calculate dimension 'C' add:	(toe space height)	4 1/2
	(bottom frame rail)	+ 1 1/2
(warming	drawer cutout height)	+'G'
(mid-rail above wa	arming drawer cutout)	+ 3
,	total measurement for	'C'



TALL OVEN CABINET WITH WARMING DRAWER

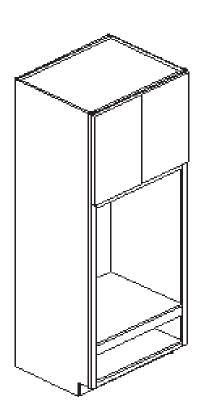

- 24" deep standard
- Specify both cutout sizes (width X height) and distance from floor to bottom of lower cutout. Use of template page for TWDOC is recommended.
- Standard placement is 6" off of floor. A 3" rail will separate the cutouts unless otherwise specified.
- The cutout width can be no more than 1 1/2" less than the overall cabinet width, this leaves a minimum of 3/4" for each frame stile (left and right). Example: 30" wide

cabinets, the largest cutout width allowable is 28 1/2".

- 3" rail above and below oven cutout.
- Number of shelves in the upper section of Tall Oven Cabinets will vary according to the opening size.
 This

opening is determined by the oven cutout and height off

the floor specifications.

- Cutout back at oven opening only.
- Toe base shipped loose for cabinets over 84" tall.
- See template page for more details.
- Appliance openings in frames will not have a beaded perimeter when ordered on beaded inset cabinetry.
 Designer must specify in writing if the appliance opening is to have a bead.

	PRODUCT CODE	LEVEL 1	LEVEL 2
84" tall	TWDOC248424		
	TWDOC278424		
	TWDOC308424		
•	TWDOC338424		
	TWDOC368424		
90" tall	TWDOC249024		
•	TWDOC279024		
	TWDOC309024		
	TWDOC339024		
,	TWDOC369024		
,			
93" tall	TWDOC249324		
	TWDOC279324		
,	TWDOC309324		
	TWDOC339324		
	TWDOC369324		
96" tall	TWDOC249624		
	TWDOC279624		
	TWDOC309624		
	TWDOC339624		
•	TWDOC369624		
•			
102" tall	TWDOC2410224		
•	TWDOC2710224		
,	TWDOC3010224		
•	TWDOC3310224		
,	TWDOC3610224		
•			

NOTE: TWDOC cabinet cannot have decorative ends except for a standard finish end or standard flush finish when using maximum width cutout for the specific cabinet's overall width.

TALL FILLERS

TALL FILLER

- 3/4" solid wood frame stock
- Standard widths of 3" and 6"
- Standard ships finished on face and all four 3/4" edges.



Fillers are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.


PRODUCT LIST CODE	PRODUCT LIST CODE
3" wide filler	6" wide filler
TF379.5	TF679.5
TF384	TF684
TF385.5	TF685.5
TF388.5	TF688.5
TF390	TF 690
TF391.5	TF691.5
TF393	TF693
TF396	TF696
TF397.5	TF697.5
TF3102	TF6102
TF3103.5	TF6103.5
TF3108	TF6108

TALL OVERLAY FILLER STRIP

- Overlay only, does not include filler.
- Standard has all four edges profiled to match door edge.
- Length will match height of door/drawer overlay.
- Finished on face and all four 3/4" edges.
- Madrid, Sardinia, and Valletta overlays cannot be any smaller than 2 7/8" wide.
- When adding flutes:
 - 2 flutes are standard on TOFS3 (2 3/4" wide)
 - 5 flutes are standard on TOFS6 (5 3/4" wide)

	PRODUCT CODE	LIST
2 3/4" wide	TOFS 384	
•	TOFS 390	
•	TOFS 393	
•	TOFS 396	
•	TOFS 3102	
•		
5 3/4" wide	TOFS 684	
•	TOFS 690	
•	TOFS 693	
•	TOFS 696	
•	TOFS 6102	





PRODUCT LIST CODE

	13" deep
1.5" wide	TFR1.58413
	TFR1.59013
	TFR1.59313
	TFR1.59613
	TFR1.510213
3" wide	TFR38413
	TFR39013
	TFR39313
	TFR39613
	TFR310213
6" wide	TFR68413
	TFR69013
	TFR69313
	TFR69613
	TFR610213
	24" deep

24" deep 1.5" wide TFR1.58424

TFR1.59024 TFR1.59324

TFR1.59624

TFR1.510224

3" wide TFR38424

TFR39024 TFR39324

TFR39624

TFR310224

6" wide TFR68424

TFR69024

TFR69324 TFR69624

TFR610224

(30" deep continued on next page)


TALL FILLER WITH RETURN

- 1 1/2" wide, 3" wide, or 6" wide solid wood face frame with 3/4" return panel.
- 13"deep, 24" deep, or 30" deep
- Specify L or R side for return (left shown).
- Return panel is finished on both sides.
- Add modification charge for <u>flush</u> finished end.
- Add modification charge for flush toe kick.
- Products over 96" tall may require a splice due to material limitations.



Fillers with returns are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.





TALL FILLER WITH RETURN


- 1 1/2" wide, 3" wide, or 6" wide solid wood face frame with 3/4" return panel.
- 13"deep, 24" deep, or 30" deep
- Specify L or R side for return (left shown).
- Return panel is finished on both sides.
- Add modification charge for <u>flush</u> finished end.
- Add modification charge for flush toe kick.
- Products over 96" tall may require a splice due to material limitations.



Fillers with returns are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.

	PRODUCT CODE	LIST
	30" deep	
1.5" wide	TFR1.58430	
	TFR1.59030	
	TFR1.59330	
	TFR1.59630	
	TFR1.510230	
3" wide	TFR38430	
	TFR39030	
	TFR39330	
	TFR39630	
	TFR310230	
6" wide	TFR68430	
	TFR69030	
·	TFR69330	
•	TFR69630	
•	TFR610230	





TALL FILLER WITH RETURN BOTH

- 3" wide or 6" wide solid wood face frame with two 3/4" return panels.
- 13"deep, 24" deep, or 30" deep
- Finished ends on both returns are standard.
- Add modification charge for flush finished ends.
- Add modification charge for flush toe kick.
- Products over 96" tall may require a splice due to material limitations.




Fillers with returns are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.

	PRODUCT CODE	LIST
•	13" deep	
3" wide	TFRB38413	
•	TFRB39013	
•	TFRB39313	
•	TFRB39613	
	TFRB310213	
6" wide	TFRB68413	
•	TFRB69013	
	TFRB69313	
•	TFRB69613	
•	TFRB610213	
•	24" deep	
3" wide	TFRB38424	
•	TFRB39024	
•	TFRB39324	
•	TFRB39624	
	TFRB310224	
<i>(</i> " : 1	TTDD (0.12.1	
6" wide	TFRB68424	
	TFRB69024	
	TFRB69324	
·	TFRB69624	
•	TFRB610224	

(30" deep continued on next page)





	PRODUCT CODE	LIST
•	30" deep	
3" wide	TFRB38430	
	TFRB39030	
	TFRB39330	
	TFRB39630	
	TFRB310230	
6" wide	TFRB68430	
	TFRB69030	
	TFRB69330	
	TFRB69630	
•	TFRB610230	·

TALL FILLER WITH RETURN BOTH


- 3" wide or 6" wide solid wood face frame with two 3/4" return panels.
- 13"deep, 24" deep, or 30" deep
- Finished ends on both returns are standard.
- Add modification charge for flush finished ends.
- Add modification charge for flush toe kick.
- Products over 96" tall may require a splice due to material limitations.



Fillers with returns are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.



TALL ANGLED FILLERS



PRODUCT CODE	LIST
TAFR384	
TAFR390	
TAFR393	
TAFR396	
TAFR3102	

TALL ANGLED FILLER WITH RETURN

- 3/4" return panel
- 45 degree angle
- Occupies 3" of cabinet run
- Specify left [L] or right [R] end of cabinet run (left shown).
- Overall depth is 24", return depth is 21"
- Return panel is finished on both sides.
- Add modification charge for flush finished end.
- Products over 96" tall may require a splice due to material limitations.



Fillers with returns are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.

TALL ANGLED FILLER

- 3/4" solid wood filler
- Edges cut for 45 degree installation
- Occupies 3" of cabinet run
- Specify left [L] or right [R] end of cabinet run (left shown).



Fillers are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.

TAF384	
TAF390	
TAF393	
TAF396	
TAF3102	



REFRIGERATOR LEGS



ARLS2490 illustrated

REFRIGERATOR LEGS (STRAIGHT)

- 3/4" panel
- Finished both sides.
- Edge banding on one long 3/4" edge.
- Products over 96" tall may require a splice due to material limitations.



These panels are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.

	ARLS24108
30" wide	ARLS3084
	ARLS3090
	ARLS3093
·	ARLS3096
	ARLS30102
	ARLS30108

ARL1384 ARL1390

PRODUCT

CODE

ARLS1384 ARLS1390 ARLS1393 ARLS1396

ARLS13102 ARLS13108

ARLS2484 ARLS2490 ARLS2493 ARLS2496 ARLS24102


13" wide

24" wide

13" wide

Furniture

LIST



REFRIGERATOR LEGS

- 1 1/2" front frame with 3/4" return panel.
- Finish end standard.
- Add modification charge for flush finished end.
- For a Furniture flush end only on the ARL, add the Furniture Refrigerator Leg modification, MFURNARL.
- Products over 96" tall may require a splice due to material limitations.



These panels are shipped at the size indicated in the product nomenclature and are not cut down at the factory except by special request only.

	ARL1393
	ARL1396
	ARL13102
	ARL13108
24" wide	ARL2484
	ARL2490
	ARL2493
	ARL2496
	ARL24102
	ARL24108
30" wide	ARL3084
	ARL3090
	ARL3093
	ARL3096
	ARL30102
	ARL30108
urniture Refrigerator	MFURNARL
Leg modification	



TALL ACCESSORIES

PRODUCT CODE

TALL END SKIN, LOOSE

ATSKIN \$ Per


1/4" panel matching specie and finish of order.

SQ FT

CLOSET ROD

• 1 1/2" thick natural maple closet rod, removable.

If cabinet has the MWI modification, the closet rod accessory will
match the specie and finish of the order.



ACR

METAL CLOSET ROD AMR

• 1 1/16" diameter steel closet rod with chrome finish, removable.







TALL TRAY DIVIDER ATTD

- 1/2" UV Birch veneer divider installed in upper section.
- Specify location and spacing of multiple dividers.
- Tray dividers will be equally spaced in the opening unless otherwise specified.
- Tray dividers are not removable.
- Adjustable shelves cannot be adjacent to tray dividers. A partition must be used if adjustable shelves are needed.

TALL PARTITION ATP

- 3/4" UV Birch veneer plywood, located in lower opening.
- When specified for cabinets with shelves, shelves are installed on both sides.
- Use when adding an accessory on one side of cabinet, shelves are installed on opposite side.
- Partition will be centered unless otherwise specified.
- Specify location of partition and side of accessory installation if desired.

TALL SHELF ON DOOR ATSD

• Wood shelf rack with adjustable shelves mounted on cabinet door of lower section.

FLIPPER (POCKET) DOOR GLIDES

AFDG

Installed mechanism for stowing door inside cabinet as in entertainment cabinets. Minimum cabinet depth is 13 1/2" to allow for hardware.

- Add to cabinet price; priced per set of doors.
- Adding flipper doors to a cabinet will cancel all adjustable shelves in that section. When needing adjustable shelves, a loose shelf accessory will need to be added to cabinet price for each adjustable shelf.
- When needing finished interior, the matching wood interior modification will need to be added to cabinet price.
- When adding flipper doors to cabinet, interior opening width will be 8" less than the overall cabinet width if FOL-C. If SOL or Inset, the interior opening width will be 9 1/4" less than the overall cabinet width. Example: 30" wide, FOL-C cabinet will have an interior opening size of 22" wide.
- Doors larger than 26" wide or 72" tall require large flipper door glides (ALFDG).

HANGING FILE RAILS

AHANGINGFILE \$/

• One pair hanging file rails installed in drawer. Front to back rails illustrated. **Standard guidelines for file rail direction:**

Cabinets with a <u>frame opening</u> of less than 15" wide will have file rails that run side to side. Cabinets with a 15" wide <u>frame opening</u> or greater will have file rails that run front to back. Specify direction of file rails only if different from standard. (15" wide cabinets cannot accept front to back file rails.)

• Cannot fit most standard cabinet configurations (needs a 10" deep box to accommodate, MFC will be needed on cabinet to make this change)



pair of rails



NOTES



TALL ACCESSORIES

DELUXE UNDERMOUNT ADJUSTABL	E ROLLOUT SHELVES	
	2" HIGH (UP TO 24" WIDE)	ADUAROS2402
	2" HIGH (UP TO 42" WIDE)	ADUAROS2502
Magaza	4" HIGH (UP TO 24" WIDE)	ADUAROS2404
	4" HIGH (UP TO 42" WIDE)	ADUAROS2504
The state of the s	6" HIGH (UP TO 24" WIDE)	ADUAROS2406
	6" HIGH (UP TO 42" WIDE)	ADUAROS2506

PRODUCT

CODE

LIST

Adjustable natural maple rollout shelves with Blumotion full extension, undermount drawer glides on wood pilasters. If the rollout and its components need to have the specie and finish match the interior of a cabinet with a MWI modification, a quote must be submitted prior to the order being placed for correct pricing and material availability.

- Price per rollout shelf
- 100# weight capacity
- Routed handpull centered in top edge of box front.

located at bottom of section unless otherwise specified.

- Dovetail construction
- Fixed center frame stile is omitted when adding a full width rollout to a cabinet 39" wide and over or a sink base.
- Not recommended for cabinets less than 15" wide. Not available for cabinets less than 9" wide or 12" deep. **Note: when using combination of rollouts and adjustable shelves in the same opening, rollouts will always be

See below for additional guidelines.

Rollout Installation Guidelines

We have classified the addition of rollouts into two different categories based on usage. First, adding rollouts to wall cabinets or an upper portion of any cabinet, will be based on the same set of rules. (Upper portion is defined as any section of any cabinet which also has a lower opening.) Then, the addition of rollouts to base cabinets and the lower portion of tall cabinets will be based on another set of rules.

- 1. Rollouts in wall units and upper portions of tall/base units. (Sink base cabinets will follow this same set of rules.)
 - a. When adding **a single rollout**, the rollout will be permanently mounted to the floor in that section, utilizing our Blumotion full extension under-mount glides.
 - b. Also, when adding a single rollout, the quantity of adjustable shelves in that section will remain the same.
 - c. When adding **more than one rollout** to a section all adjustable shelves will be deleted. When adding adjustable shelves back into the opening, each shelf will be notched to accept the ladders which are installed for the rollouts.
 - d. Also, when adding **more than one rollout** to a section our standard rollout ladder configuration will be utilized by installing the ladders full height in the interior of that section. (Full height is full usable height determined by Brighton.)
- 2. Rollouts in lower openings of base/tall units. (Except sink base cabinets.)
 - a. When adding a single rollout or more than one rollout, our standard rollout ladder configuration will be utilized by installing the ladders in the complete interior height of that section.
 - b. Also when adding **a single rollout** or **more than one rollout**, all adjustable shelves will be deleted. When adding adjustable shelves back into the opening, each shelf will be notched to accept the ladders which are installed for the rollouts.

These rules have been adopted as a standard practice for Brighton Cabinetry, Inc. Any deviation from this process must be in writing in the notes section of the order. All cabinets in our catalog with rollouts included will also follow the guidelines listed above.



NOTES




TALL ACCESSORIES

BRIGHTON	TALL ACCI		PRODUCT CODE	LIST
TOE KICK DRAWER - 24" DEEP			ATKD1824	
Add to 24" deep cabinets.Operational, 2" high drawer box added space.	into toe kick	24"	ATKD2124	
 3/4" thick solid wood face frame at bot Toe notch for side of cabinet remains t and depth as standard after the 1/4" AN 	he same height	-341"-	ATKD2424 ATKD2724	
applied to adjacent cabinets.Actual front to back depth of drawer be	ox is 18" for 24"	-101	ATKD3024	
 deep unit. Drawer fronts are slab, 5 pc. not availa 		3 1/4" SIDE VIEW	ATKD3324	
 Minimum overall cabinet depth is 18" access to the drawer box under the cab Illustration depicts B3D cabinet with A installed. 	inet.		ATKD3624	
TOE KICK DRAWER - 21" DEEP			ATKD1821	
Add to 21" deep cabinets.Operational, 2" high drawer box added	into too kiek	21"	ATKD2121	
operational, 2 high drawer box added space.3/4" thick solid wood face frame at bot		23"	ATKD2421	
• Toe notch for side of cabinet remains t and depth as standard after the 1/4" AN	he same height	-342	ATKD2721	
applied to adjacent cabinets.Actual front to back depth of drawer be	ox is 15" for 21"	17 3/4"	ATKD3021	
deep unit.Drawer fronts are slab, 5 pc. not availaMinimum overall cabinet depth is 18"		SIDE VIEW	ATKD3321	
access to the drawer box under the cab Illustration depicts B3D cabinet with A installed.	inet.		ATKD3621	
TOE KICK DRAWER - 18" DEEP		18"	ATKD1818	
Add to 18" deep cabinets.Operational, 2" high drawer box added	into toe kick		ATKD2118	
space.3/4" thick solid wood face frame at bot		-34 <u>1</u> "	ATKD2418	
• Toe notch for side of cabinet remains t and depth as standard after the 1/4" AM	_	- [C ₂]]	ATKD2718	
applied to adjacent cabinets.Actual front to back depth of drawer be deep unit.	ox is 12" for 18"	14 3/4"	ATKD3018	
• Drawer fronts are slab, 5 pc. not availa			ATKD3318	
 Minimum overall cabinet depth is 18" access to the drawer box under the cab Illustration depicts B3D cabinet with A installed. 	inet.		ATKD3618	





EXTENDED RAIL AND STILE ILLUSTRATIONS

* Tall cabinet top rail modifications will function like wall cabinets.

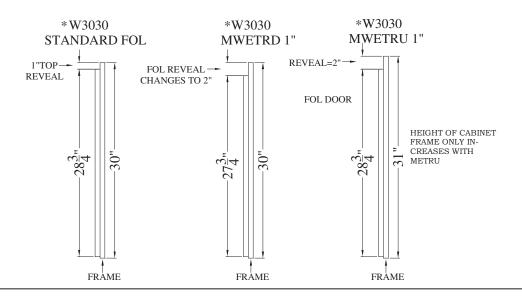

* Tall cabinet bottom rail modifications will function like base cabinets.

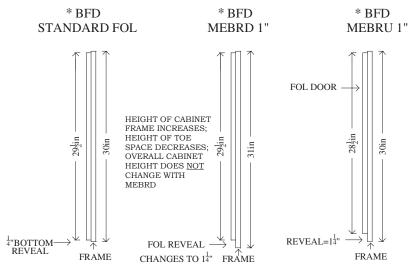

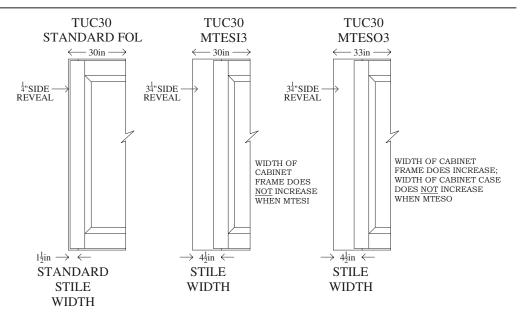



	PRODUCT CODE	SPECIFY	LIST
TALL EXTENDED STILE OUT UP TO 3" (see previous page for illustrations)	MTESO3	L/R	
Stile extends outward from cabinet, increasing overall frame width by the amount specific Overlay filler strips are available for full-overlay flush look. (See tall cabinet accessories)		on.	
TALL EXTENDED STILE OUTUP TO 6" (see previous page for illustrations)	MTESO6	L/R	
Stile extends outward from cabinet, increasing overall frame width by the amount specific Overlay filler strips are available for full-overlay flush look. (See tall cabinet accessories)		on.	
TALL EXTENDED STILE INUP TO 3" (see previous page for illustrations)	MTESI3	L/R	
Stile extends inward, overall frame width does not change. Overlay filler strips are available for full-overlay flush look. (See tall cabinet accessories)			
TALL EXTENDED STILE INUP TO 6" (see previous page for illustrations)	MTESI6	L/R	
Stile extends inward, overall frame width does not change. Overlay filler strips are available for full-overlay flush look. (See tall cabinet accessories)			
TALL EXTENDED STILE DOWN	MTESD	L/R	
Extends stile (specify left or right) down into the toe kick space to meet the floor.			
EXTEND TOP OR BOTTOM RAIL UP (see previous page for illustrations)	METRU		
Add to cabinet price. Indicate overall dimension.	MEBRU		
EXTEND TOP RAIL DOWN (see previous page for illustrations)	METRD		
Add to cabinet price. Indicate overall dimension.			
VALANCE TOP RAIL	MVTR		
Extends a standard 1 1/2" wide top rail down for an overall rail width of 5". Price for cabinets up to 42" wide. Specify shape: Classic Arch, Elegant Arch, Straight, Arched, Furniture, Shaker style A or Provide a sketch or template for custom pattern, requires quote.	Shaker style C.		
VALANCE BOTTOM RAIL	MVBR		
Price for cabinets up to 42" wide. Specify shape: Classic Arch, Elegant Arch, Arched, Furniture, Shaker style A or Shaker stmodification, when the Straight valance design is wanted. Provide a sketch or template for custom pattern, typically requires a quote. Base and tall cabinets with this bottom rail modification will still have the subtoe behind to ships finished and will not require a separate AMTK.			
TALL EXTEND SIDE BACK	MTESB	L/R	\$ /ea.6"
Specify the length of the extension beyond the standard depth. 48" overall maximum dep Back edge will not be finished as standard. Please specify on order for finished edge and		EB charges.	
TALL RECESSED SIDE	MTRS	L/R	
Normally used when a recess allowance is needed for a field applied panel. The cabinet face frame and door reveals will not change with this modification. Most standard cabinets already have 1/4" recess behind the face frame, specify TOTAL amount needed. Maximum overall recess allowed = 7/8".			



PRODUCT LIST **CODE** TALL FRAME CHANGE **MFC** Includes one or all changes made to frame. (excluding extended stiles and rails) Specify changes and dimensions; provide sketch INCREASE CASE DIMENSION MODIFICATION **MICDIM** Used to increase height, and/or width, and/or depth above the largest standard sizes. Cabinet may be increased up to 3" larger for any or all dimensions. Dimension increases beyond 3" require a quote. Some restrictions apply due to material availability. Any cabinet increased in width to 39" or above will have a fixed center stile as standard. Drawer boxes and rollouts will increase with the cabinet depth up to 27" deep cabinets. Anything increasing over 27" in depth must be verified with Customer Service for availability before ordering. Wall cabinets and sink cabinets can be increased in depth only up to a maximum of 3" beyond the standard cabinet depth for no up charge at all. MATCHING WOOD INTERIOR **MMWI** Priced as % of list price, added to cabinet price. Wood specie and finish match frame and doors. When selecting matching wood interior on cabinets with more than one section (ie, tall cabinets or combined cabinets) the entire interior of all sections will be matching wood interior as standard. The grain on interior backs may be horizontal on cabinets larger than 48" wide. COMBINE CABINET CHARGE **COMBINE** Used to combine two or more cabinets. One charge per combination of two cabinets. TALL FRONT ONLY **MTFRO** Subtract from base price of cabinet. Doors are hinged and working. Specify if fixed doors are required. Floor not included. Unless specified, front will be shipped without sub-toe kick. Overall frame height will be 4 1/2" less product height ordered unless MFTK (flush toe) is added. Example: TUC1884R (std. 84" high overall) + MTFRO ordered, shipped frame height = 79 1/2". **OMIT DOORS** MOD Interior remains standard finish unless matching wood interior modification is used. ADD CENTER STILE **MACST** To add a vertical center stile to any cabinet. Standard 1 1/2" wide stile, specify width of stile if different dimension is desired. ADD CENTER RAIL **MACRT** To add a horizontal center rail and fixed floor to any cabinet. Standard 1 1/2" wide rail, specify width of rail if different dimension is desired. Include specific information for placement of rail, provide drawing if possible. Charge includes cost for dividing doors into separate uppers and lowers.

APPLIED MOLDING CHARGE

Charge to apply molding, ornaments, and appliqué to cabinets.

\$ Each

MAMC



NOTES



PRODUCT SPECIFY LIST CODE

Furniture Ends-Locking Miter Joint

True flush ends with no seams, making crown, base, and light rail moldings easier to attach, no scribe molding needed Not available on diagonal corner cabinets, angled cabinets, clipped corner, or radius cabinets.

Tall Furniture Finished End (Left, Right, or Both ends)

MTFURNFE

L/R

\$ /SQFT

Tall Furniture False Door Ends (Left, Right, or Both ends)

MTFURNFD

L/R

\$/SQFT

Tall Furniture Wainscot End (Left, Right, Both ends)

MTFURNWP

L/R

\$/SQFT

Not available with any miter doors, Also not available with Churchill, Madrid, Plainfield, Plainfield MDF, Sardinia, Valletta, or Verona door designs





BRIGHTON	TALL MODIFICATIONS	PRODUCT	CDECIEV	LIST
		CODE	SPECIFY	LIST
TALL FINISHED END		MTFE	L/R	\$ /
Side of cabinet matches specie and sta Side retains 1/4" scribe reveal same as Note: When installing shallower cabin	unfinished side. ets against the side of a tall cabinet, it	is recommended to	o use a	SQ FT
flush finished end modification to corr	ectly align cabinets.			
TALL FLUSH FINISHED END		MTFFE	L/R	\$ /
A 1/4" panel is applied creating a flush Side of cabinet matches specie and sta				SQ FT
FINISHED BACKS 1/2"		MFBAH		\$ /
Back thickness does not affect overall	depth of cabinet. Vertical grain is stan	dard.		SQ FT
TALL FALSE DOOR ON END		MTFDE	L/R	\$ /
Includes flush finished end.				SQ FT
TALL WAINSCOT END PANEL		MTWEP	L/R	\$ /
A 3/4" panel constructed from same m Center panel will be divided to best ali Bottom rail will be wider for toe space to allow for molding installation. Not available for mitered door styles	gn with doors on face of cabinet. cunless cabinet ships with a side toe or		uil is wider	SQ FT
TALL BEAD BOARD END		MTBDE	L/R	\$ /
1/2" solid wood, tongue and groove be	ead board, factory installed on cabinet	side.		SQ FT
BEAD BOARD INTERIOR BACK		MBDIB		\$ /
1/2" solid wood, tongue and groove be	ead board installed in the back of cabin	iet.		SQ FT
TALL GROOVED PANEL LEFT /		MTGP	L/R	\$ /
1/4" veneered panel with MDF core ap 1 1/2" apart. Other designs to match gr of front frame and doors. Not availabl or Rustic Hickory: standard grade wood	rooved doors are available upon requeste for any finish with wear sanding.	st. Matches specie	and stain	SQ FT
TALL GROOVED PANEL INTER	OR BACK	MTGPIB		\$ /
1/4" veneered panel with MDF core in spaced 1 1/2" apart. Other designs to restain of front frame and doors. Use with available for any finish with wear san grade wood will be substituted.	natch grooved doors available upon reath MWI modification to finish the remains.	quest. Matches spe ainder of cabinet in	ecie and nterior. Not	SQ FT
TALL GROOVED PANEL BACK	(1/2")	MTGPBAH		\$ /
1/2" veneered panel with MDF core ap 1/2" apart. Other designs to match grofront frame and doors. Back thickness ish with wear sanding. Not available substituted.	oved doors are available upon request. does not affect overall depth of cabine	Matches specie aret. Not available for	nd stain of or any fin-	SQ FT
TALL FINISHED TOP		MTFT		
Matches specie and finish of cabinet. ished top. Edgebanding for the side edappropriate EB charges apply.				
TALL FLUSH FINISHED TOP		MPFFT		\$ /
1/4" flush panel matches specie and fin To cover exposed side edges of flush f		oe ordered.		SQ FT



PRODUCT SPECIFY LIST CODE TALL SIDE ANGLED MTSA L/RSide is angled, front frame is parallel to back. Include a top view sketch with dimensions of side and front. Specify a degree of angle. Use widest dimension of finished cabinet as initial starting price then add modification charge. TALL ANGLED SIDE ENTRY **MTAE** L/RThis modification is like tall side angled but with frame and working door. Include a top view sketch with dimensions of side and front. Specify degree of angle and hinging. Use widest dimension of finished cabinet as initial starting price then add modification charge. TALL ANGLED FRONT **MTAF** L/RFront is angled, sides remain perpendicular to back. Include a top view sketch with dimensions of sides and front. Specify overall cabinet size. Indicate depth of right and left sides. Minimum depth is 4" for adjustable shelves. Use widest dimension of finished cabinet as initial starting price then add modification charge. TALL END ENTRY **MTEE** L/RSpecify door hinging. Add modification charge to initial starting price of cabinet. DOUBLE ENTRY **MDE** Add modification charge to initial starting price of cabinet. Specify hinging on rear if different from front entry. FLUSH TOE KICK **MFTK** Per cabinet front Note: When adding this to base or tall cabinets and also requesting that the flush toe is cut into a valance shape, there will be a subtoe behind the valance bottom rail. The subtoe piece ships finished and does not require a separate AMTK. LOOSE TOE KICK **MLSTK** Shipped loose. Overall shipped cabinet height is reduced 4 1/2". **OMIT TOE KICK** NOTK Removes the toe kick area from the cabinet. Overall shipped cabinet height is reduced 4 1/2". INTEGRATED TOE KICK **MINTTK** Toe kick area of tall cabinet is integrated into the case construction. Used on cabinets over 84" tall that ship standard with a loose toe base. Note: Adding this modification could interfere with installation of the cabinet. Allow for proper ceiling clearance. SIDE TOE KICK **MLTK** (Left) **MRTK** (Right) Add to cabinet price MLRTK (Left/Right) Specify left, or right, or left and right **BACK TOE KICK MBTK** (Back) MBLTK (Back/Left) Add to cabinet price (Back/Right) MBRTK Specify back or combination of back and side(s) MBLRTK (Back/Left/Right)



PRODUCT **SPECIFY** LIST CODE

L/R

\$

Per side

UNIVERSAL ACCESS TOE KICK SPACE

Modifies the cabinet's toe kick to 9" high x 6" deep as recommended by the Americans with Disabilities Act 2010 standards. Specify if other dimensions are needed.

Note: Using this modification can affect other aspects of the cabinetry and may cause some configurations to no longer be available. Examples of this include, but are not limited to, a B4D and a BM2DF.



TALL DUCT CUTOUT **MTDCO**

Include a top view sketch with cutout dimensions and location.

TALL CLIPPED CORNER

Stile is angled at 45 degrees.

This modification does not increase the width or depth of the cabinet.

The face frame is decreased by 3" per clipped corner.



MUATOE

MTCC

TALL FLUTING **MTFLUTE**

Three flutes are standard, based on 3"filler

Routed on filler or stile up to 6" wide.

Specify the number of flutes. (1 flute per inch is recommended).

Standard is 3/8" flute with 3/8" space between flutes.

Limits will normally align with adjacent cabinets.

Minimum filler width is 1 1/2".

Provide sketch on special fluting requirements.


ROSETTE DESIGN

Routed into filler, usually accompanies fluting.

Style A (2 1/4") is for 3" filler or overlay filler (2 3/4") with machine or L149 edge. Minimum overlay filler width will be 3 1/8" for all other edge profiles.

Style B (3 1/8") is for 6" filler.

MROSETTE




U-SHAPE DRAWER BOX MODIFICATION

Modifies an existing drawer box to have a cutout centered, side to side, allowing space for pipe work. <u>Drawer box</u> width must be at least 12" (12 3/8" frame opening). Must specify dimensions 'A' and 'B' as shown on the template. 'C' can be no less than 3".

MUDRBOX

per drawer

\$





PRODUCT **SPECIFY** LIST **CODE** SOL/INSET FOLC **MTADS** TALL ADDITIONAL DRAWER, STANDARD **SLAB** Use this modification to add a drawer that would require a frame opening of 6" H or less. 1INSLAB Blumotion glides standard: other glide styles will be substituted when the frame opening for the 5-PIECE drawer boxes are under 6" wide or cabinet is less than 12" deep. This price includes drawer box, hardware, drawer front, and frame change. SOL/INSET FOLC TALL ADDITIONAL DRAWER, DEEP **MTADD** Use this modification to add a drawer that would require a frame opening greater than 6" high. **SLAB** Blumotion glides standard: other glide styles will be substituted when the frame opening for the 1INSLAB drawer boxes are under 6" wide or cabinet is less than 12" deep. 5-PIECE This price includes drawer box, hardware, drawer front and frame change. 5-PIECE DRAWER HEAD UPGRADE 5-P(RAIS) -FOL 5-P(FLAT) -FOL 5-P(RAIS) -SOL/INSET Price per drawer head. The top and bottom rails of the drawer head are cut down for most designs. 5-P(FLAT) -SOL/INSET 1" THICK, SLAB DRAWER FRONT UPGRADE 1-INSLAB-FOL 1-INSLAB-SOL/INSET Price per drawer head. Not available to match all designs. Not recommended with slab doors or designs with flat center panels. See Introduction for more information. SCOOPED DRAWER SIDES **MSDS** Standard scoop is 2" down from top edge and begins 1-1/4" back from front edge unless otherwise specified. Minimum drawer box height is 4". OMIT OPERATING DRAWER BOX MOODB -\$ Omits the operating drawer box and hardware from a standard cabinet. The drawer front will per drawer be attached to the cabinet as a false front. If the cabinet has more than one drawer top-tobottom, this modification will remove the top drawer box unless otherwise specified. If the cabinet has multiple drawers side-to-side, you must specifically note on the order which box is to be removed, such as 'omit left drawer box'. FLIP UP DOOR STAY **MFUDS** \$ / CAB • Supports a door hinged to the top of a cabinet opening (2 doors max.) • Priced per cabinet (2 doors maximum) • Will not fit frame opening less than 7" high FLIP DOWN DOOR STAY **MFDDS** \$ / CAB (2 doors max.) • Supports a door hinged to the bottom of a cabinet opening • Priced per piece (2 doors maximum) • Will not fit frame opening less than 7" high 90 DEGREE HINGING (concealed hinge only) MT90DEG-L • Hinge with restricted swing of approximately 90 degrees. MT90DEG-R

• Available for concealed hinges only.

Priced per cabinet sideSpecify side: L or R